



COMMERCIAL GRAIN SOLUTIONS




102 Arnold St.
Wallaceburg, ON
N8A 3P4

Tel: 519-627-8228
Toll Free: 1-888-239-9713

www.LambtonConveyor.com
sales@lambtonconveyor.com



BUCKET ELEVATORS

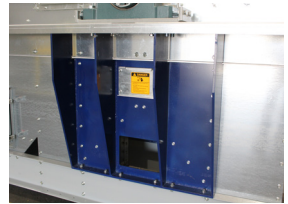

STANDARD FEATURES

- » Pillow Block Double Row Spherical Roller Bearings
- » AR Steel Lined
- » Polyethylene Buckets
- » Heavy-Duty Wing Pulley with XT Bushings
- » Standard Belting
- » Standard Ladder and Platform Package

OPTIONAL FEATURES

- » SAF Bearings
- » Adaptor Mount Bearings
- » Ceramic Chip Liner
- » Weld-In Ceramic Tile Liner
- » Steel, Nylon, or Urethane Buckets
- » Herringbone Wing Pulley
- » PVC Belting
- » Safety Cage
- » Custom Platforms

Pulley Diameter	RPM	Belt Speed	BPH
42"	60	660	10,000-18,400
42"	64	700	22,000
42" Double Row	64	700	25,500-44,000

CHAIN CONVEYORS



STANDARD FEATURES

- » 8GA Galvanized Sides
- » 8GA Galvanized Bottom
- » 12GA Hipped Top Covers
- » ISAF Head Bearings
- » S-2000 Boot Bearings, HD Takeups

OPTIONAL FEATURES

- » 3/8" AR400 Bottom Liner
- » 1/4" AR MED Bottom Liners
- » 1/4" AR MED Side Liner
- » 1/8" AR MED Side Liner
- » 81XHH Chain
- » WH124 Chain
- » WH124XD Chain
- » Split Sprockets
- » Direct Drive

Model #	FPM	BPH	MTPH	Max Length (ft)
GLD-24x30-120	120	20,000	550	200
GLD-24x30-150	150	25,000	680	190
GLD-24x30-178	178	30,000	810	160
GLD-32x30-120	120	27,000	730	200
GLD-32x30-150	150	34,000	921	190
GLD-32x30-178	178	40,000	1085	180
GLD-36x30-120	120	30,000	810	200
GLD-36x30-150	150	38,000	1036	180
GLD-36x30-178	178	45,000	1220	160



FLAT BACK DISTRIBUTOR

FEATURES

- » Galvanized, weather tight enclosure
- » Large, hinged inspection door from top to bottom
- » Heavy-duty, long-lasting construction
- » Positive position locking
- » Schedule 40 pipe for inner spout, thick walled pipe for longevity
- » Inner spout brush to ensure product control
- » Cable or electric actuated
- » Easy turning (with UHMW guide)
- » Round flange inlets and outlets
- » Short throat for limited loss of discharge height

LINER OPTIONS

- » UHMW
- » AR
- » CERAMIC CHIP



Outlet Size	BPH
12"	7910
14"	10780
16"	14000
18"	17780
20"	21980
22"	26740
24"	31500


DUAL INLET PENDULUM DISTRIBUTOR

FEATURES

- » Large inspection door at each
- » Heavy-duty, long-lasting con
- » Positive position locking
- » Cable or electric actuated
- » Easy turning (with UHMW gu
- » Round flange inlets and outl
- » Short throat for limited loss c
- » Standard AR steel liners in pe
- » Hinged after large

LINER OPTIONS

- » STANDARD URETHANE
- » UHMW
- » AR
- » CERAMIC CHIP

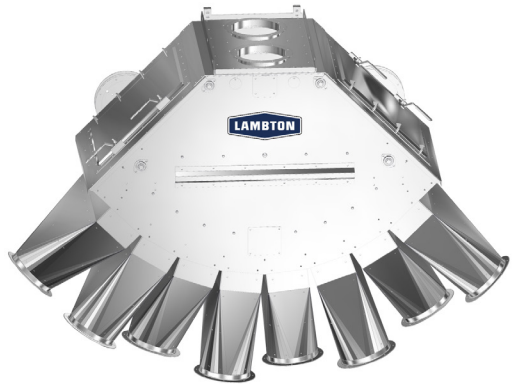

Diameter (in)	12"	14"
BPH	8482	11550
MTPH	237.5	323.4

